


| TG-10 TURBO GRINDER STRIP GRIND REMOVE  | MODEL # | TG-10-11H | TG-10-5 | TG-10-5 | TG-10-13P |
|--|-------------|--------------|--------------|----------------|-----------------------|
| | PART # | 56600 | 56900 | 56800 | 56700 |
| | POWER | Gasoline | Electric | Electric | Propane |
| | HORSE POWER | *11 HP | 5 HP, 230V | 5 HP, 230/460V | **13 HP, 12 V Starter |
| | PHASE | N/A | Single | Three | N/A |
| | AMPS | N/A | 19.8 | 12/6 | N/A |
| | *RPMs | 1826 | 1500 | 1500 | 1826 |
| | BELTS | Std "V" Belt | Std "V" Belt | Std "V" Belt | Std "V" Belt |
| | LENGTH | 43" | 43" | 43" | 43" |
| | WIDTH | 21" | 21" | 21" | 21" |
| HEIGHT | 37" | 37" | 37" | 37" | |
| WEIGHT | 180 lbs | 208 lbs | 208 lbs | 254 lbs | |

PRODUCTION RATE: 10" Working Width will grind approximately 400-500 Sq. ft. per hour at 1/16" depth with Dyma-Dots.

INCLUDES: 1 - 10" Multi-Tooling Disc & Standard 2" - 3" Multi Vacuum Port and water port, includes leveling system.

REQUIRES: 3 or 6 Magna-Trap tools, or 1 - 10" Diamond Disc.

STANDARD RIGID HEAD IS IDEAL FOR:

- Leveling uneven expansion joints, high spots, joint curls and bridge decks
- Remove coatings, build-ups, resins and more
- Grind rough concrete surfaces.

OPTIONAL FLEX HEAD IS IDEAL FOR:

- Preparing a smooth, flat floor to receive a new coating, removing coatings
- Grind rough concrete surfaces.



TG-10



DOUBLE DYMA-DOT
Medium Part# QC2B-MC-0030
Soft Part# QC2B-SC-0030



DYMA-SEG
Medium Part# QC2S-MC-0018
Soft Part# QC2S-SC-0018



PCD w/BACKING SEGMENT
LEFT-HAND (Blue) Part# QC-PCD1-LB
(Left-Hand-For use on Single & Dual Disc Grinders)



10" GENERAL PURPOSE DISC
20 Segmented disc general purpose concrete. Medium bond (7 Matrix) 30-40 Grit - Part# 19169 - Optional

SINGLE DISC TOOLING PACKAGES

| PART # | ITEM | DESCRIPTION |
|--------|--|--|
| M105 | Medium Concrete Tooling Rental Package | 3 Double Dyma-Dots 3 Dyma-Segs, 3 PCD w/Backing Segment (Left Hand) |
| M106 | Soft Concrete Tooling Rental Package | 3 Double Dyma-Dots 3 Dyma-Segs, 3 PCD w/Backing Segment (Left Hand) |

STRIP

Flaking Paint, Glue & Adhesive, Soft Thinset, Industrial Buildups, Foam Rubber Carpet Backing

GRIND

Thin Mill Coatings, Concrete Sealers, Hard Thinset, Concrete Imperfections, Light Concrete Leveling

REMOVE

Industrial Strength Coatings, Waterproof Membrane, Hard Coatings, Pool/Cool Deck, Epoxy, Polyurea

THE TG-10 COMES STANDARD WITH A RIDGID HEAD ASSEMBLY

LIFTING BAIL

THROTTLE (GAS ONLY)

ENGINE PULL (GAS ONLY)

WEIGHT

BEARING GREASE POINTS ACCESS

DUST SKIRT

ON/OFF SWITCH


ELECTRICAL PLUG

VACUUM PORT

DEPTH CONTROL KNOB

WATER HOOK

CATALYTIC MUFFLER (PROPANE ONLY)

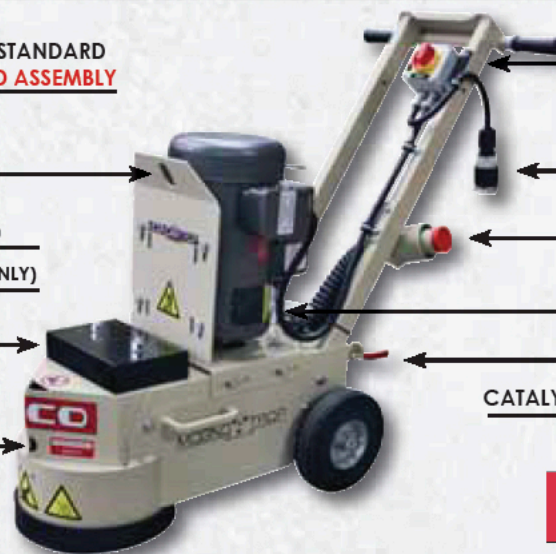

* RPM's are based on the machine's accessory speed. * NET HORSEPOWER STATEMENT - *As rated by the engine manufacturer. The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at 3600 rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the opening speed of the engine in application, environmental conditions, maintenance, and other variables. ** Call for availability. **WARNING: CALIFORNIA PROPOSITION 65: Please read page 60 for warnings.**